



[Http://www.china-greetmed.com](http://www.china-greetmed.com)



Ningbo GREETMED Medical Instruments Co., Ltd.
Add: 18F, No.1 Building, Wante Business Centre, Hi-Tech Zone, Ningbo, China
Tel: 0086-574-87739070, 87722370
Fax: 0086-574-87739075, 87722360
E-mail: info@china-greetmed.com
[Http://www.china-greetmed.com](http://www.china-greetmed.com)

MEDICAL INSTRUMENTS

[Http://www.china-greetmed.com](http://www.china-greetmed.com)

2015



Best service to all old and new clients!

Vision

Actively improve the quality of services and products to win customer satisfaction, while for each employee to bring material and spiritual aspects of the harvest, so that real wealth growth, fulfill the social responsibility and benefit society.

Mission

To fill each corner of the world with love.
To possess health for each family worldwide.

Core Values

Honesty and Faith: Honesty and Faithful character and conduct.

Optimism: A positive and optimistic attitude.

Responsibility: The spiritual sense of responsibility.

Integrity: Integrity and selfless mind.

Tolerance: Broad-mindedness of grace.

Universal love: Spirit of loving the whole world.

Philosophy

Integrity first, service supreme, unlimited love.

Management Concept

Institutionalization, standardization, humanism and internationalization.

Enterprise Concept

Three "emotions" : passion, enthusiasm and sincere.
Four "heart" : a sense of responsibility, gratitude heart, self-confidence, subject to heart.

Service Concept

Respect for customers, understanding customers, continued to provide quality products and services, to become lifelong partner of our clients.

Talent Concept

Attitude first, no excuses, no impossible, integrity, responsibility.

Work Concept

Work hard, go all out, sincere communication, courtesy, focus on learning, fun work.

Conviction

Keep their promises, highly responsible, practice what they preach, lead by example, says it will do.

Social Values

With love to do business, with action back to society, to benefit more people.

Team Concept

United, selfless, love and support.



Contents

SPHYGMOMANOMETER
Page 01~08

STETHOSCOPE
Page 09~20

THERMOMETER
Page 21~33

PHYSICIAN SCAN
Page 34~38

MOBILITY AID
Page 39~46

HOSPITAL EQUIPMENT
Page 47~60



SPHYGMOMANOMETER

1. material of valve: Copper Alloy or Zinc Alloy
2. material of tube: PVC or Latex, ID:3.00mm, OD:8.00mm, Length48-50cm
3. Gauge: Zinc Alloy, cassette mechanism: copper or stainless steel, weight:130-135g
4. material of bladder: PVC or latex,
infant size: 11X6cm, child size: 18X8.5cm, adult size: 22X12cm
5. material of cuff: nylon or cotton,
infant size: 28X8cm, child size: 34.5X11cm, adult size: 50X14cm
6. Maximum error tolerance ± 3 mm Hg
7. Any colors of tube and cuff is available



Ningbo GREETMED Medical Instruments Co., Ltd.

Add: 18F, No.1 Building, Wante Business Centre, Hi-Tech Zone, Ningbo, China

Tel: 0086-574-87739070, 87722370

Fax: 0086-574-87739075, 87722360

E-mail: info@china-greetmed.com

Http://www.china-greetmed.com

Aneroid Sphygmomanometer

- 300mmHg Gauge
- Cotton or Nylon cuff
- With or without D-ring is available
- Artery label
- Vinyl or Nylon zippered carrying case



GT001-101

Aneroid
Sphygmomanometer



GT001-110

Aneroid Sphygmomanometer
With Separate Single Head Stethoscope



GT001-111

Aneroid Sphygmomanometer
with Attached Single Head Stethoscope

GT001-120

Palm Type Aneroid Sphygmomanometer
Plastic Shell
65mm Diameter dial



GT001-121

Palm Type Aneroid Sphygmomanometer
Metal Shell
65mm Diameter dial



Best service to all old and new clients!
Best greeting to all patients in the world!



GT001-122
Palm Type Aneroid Sphygmomanometer
Metal Shell
50mm Diameter dial



GT001-123
Palm Type Aneroid Sphygmomanometer
Metal Shell
65mm Diameter dial



GT001-124
Palm Type Aneroid Sphygmomanometer
Metal Shell
50mm Diameter dial



GT001-125
Palm Type Aneroid Sphygmomanometer
Plastic Shell
65mm Diameter dial



GT001-126
Palm Type Aneroid Sphygmomanometer
Plastic Shell
55mm Diameter dial



GT001-130
Arm Type
Aneroid Sphygmomanometer



GT001-140
White plastic cover Type
Aneroid Sphygmomanometer



GT001-150
Desk Type
Aneroid Sphygmomanometer



GT001-160
Wall Type
Aneroid Sphygmomanometer

GT001-127

Five Size Blood Pressure Kit

1PC Palm Type Aneroid Sphygmomanometer Gauge
5Pcs Sizes Cuff with latex baladder & quick release

luer adapter:

1PC Infant Cuff: 28cm x8cm
1PC Child Cuff: 34.5cm x11cm
1PC Adult Cuff: 50.8cm x14cm
1PC Large Cuff: 63cm x17.5cm
1PC Thigh Cuff: 72cm x21cm
1Pc Penlight
1PC Dual head Stethoscope
1Pc Neurological Hammer
1Pc Nylon Carrying Case

Form of packing:

10pcs/carton
Size of packing:
Export carton:600x420x300mm



GT001-170

Floor Type Aneroid Sphygmomanometer

Form of packing:

One machine fill in a white box, and every one boxes in one export carton.

Size of packing:

White box:495x460x170mm
Export carton:500x470x185mm

Mercury Sphygmomanometer

300mmHg scale glass tubes


Metal case

Cotton or nylon cuff,

With or without D-ring is available

Artery label

Latex bladder with double tubes

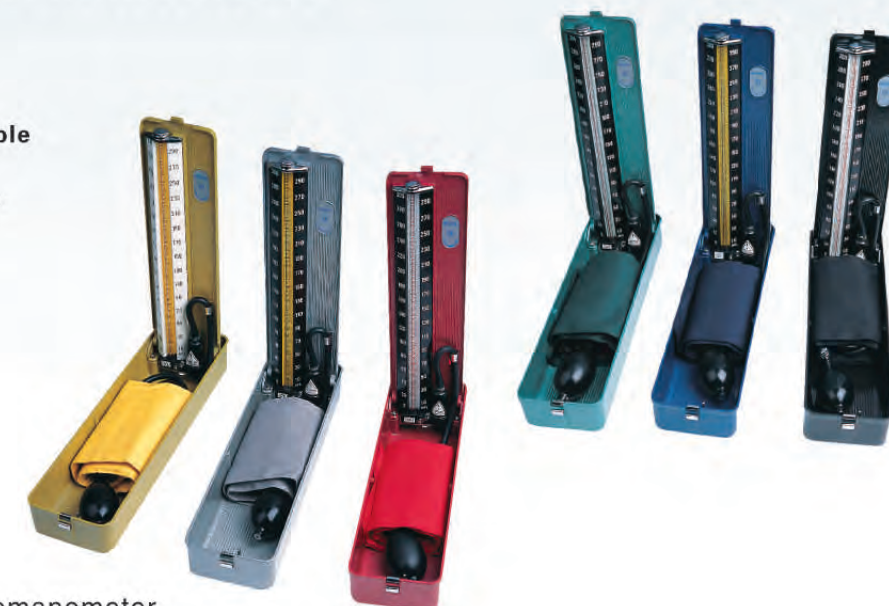

GT001-200

Professional Mercury Sphygmomanometer
Desk type



GT001-201

LCD Display



GT001-202

Light Display



GT001-210

Mercury Sphygmomanometer
Wall Type



GT001-220

Mercury Sphygmomanometer
Floor Type

*Best service to all old and new clients!
Best greeting to all patients in the world!*

Accessories



GT001-401
Zipper Case



GT001-403
Bllder



GT001-404
Bulb



GT001-402
Cuff



GT001-405
Air-release Valve



GT001-406
End Valve



GT001-407 Cuff
Material: Nylon or cotton

Fully automatic electronic blood pressure monitor

Display system: Digital display system/LCD
Measuring range: 2.7kpa-40kpa(20mmHg-300mmHg)
Accuracy: 0.5kPa(4mmHg)
Power source: Type AA batteries*4 for arm type
Type AA batteries*2 for wrist type
Operating environment: -5'C less than 95RH
Automatic power off: To be automatically cut off after few minutes of non use to save energy



GT001-301
Arm type



GT001-302
Arm type



GT001-303
Arm type



GT001-311
Wrist type



GT001-312
Wrist type



GT001-313
Wrist type

Best service to all old and new clients!
Best greeting to all patients in the world!

STETHOSCOPE

- 1.material of chest piece:zinc alloy, aluminum alloy, stainless steel
- 2.material of earloop: copper, aluminum, stainless steel
- 3.material of earplug: PVC, ABS
- 4.material of tube: PVC
- 5.Any color of tube is available



Ningbo GREETMED Medical Instruments Co.,Ltd.

Add: 18F, No.1 Building, Wante Business Centre, Hi-Tech Zone, Ningbo, China

Tel: 0086-574-87739070, 87722370

Fax: 0086-574-87739075, 87722360

E-mail: info@china-greetmed.com

Http://www.china-greetmed.com

Single head stethoscope

Oxided or Anodized Aluminum chest piece

Brass Chrome Plated Binaural

Plastic eartips

All kinds of color available for the tube such as: Black, Red, Green, Yellow, Blue, Purple, Pink, Grey, White, etc.



GT002-100

Single head stethoscope
Silver chest piece



GT002-110

Single Head Stethoscope
Colored chest piece & Binaural



GT002-130

Single head stethoscope
with plastic ring



*Best service to all old and new clients!
Best greeting to all patients in the world!*



GT002-120
Pediatric Single head Stethoscope



GT002-140

GT002-141

Deluxe Special Single head Stethoscope
Zinc alloy chest piece with
chrome plated silver finish



GT002-150
Bowles stethoscope
Chromeplated chest piece




GT002-160
Disposable Single Head Stethoscope
Plastic

Dual head stethoscope

Oxided or Anodized Aluminum chest piece
Brass Chrome Plated Binaural
Plastic or soft eartips
All kinds of color available for the tube such as: Black, Red, Green, Yellow, Blue, Purple,
Pink, Grey, White, etc.



GT002-200
Dual head stethoscope
Silver chest piece

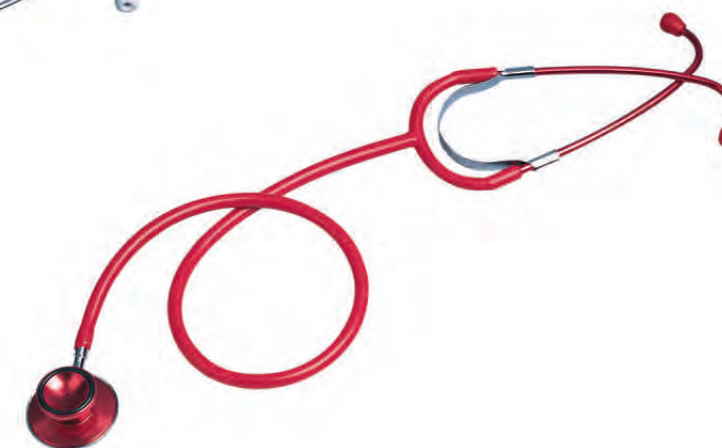

GT002-210
Dual head stethoscope
Colored chest piece & Binaural



GT002-220
Pediatric Dual Head Stethoscope



GT002-261
Teaching use dual head stethoscope

*Best service to all old and new clients!
Best greeting to all patients in the world!*

Stainless Steel Stethoscope

Stainless Steel chest piece

Stainless Steel Binaural

Plastic & soft eartips

With non-chill rims

Spare diaphragm included

All kinds of color available for the tube such as: Black, Red, Green, Blue, Pink, Grey, etc.



GT002-230

Neonatal Dual Head Stethoscope

GT002-240

Dual head stethoscope
with non-chill ring
with soft eartips



GT002-270

Stainless Steel Stethoscope
Adult type
ingle – lumen tubing

GT002-280

Stainless Steel Stethoscope
Child type



GT002-250

Dual head stethoscope
with non-chill ring
with soft eartips

GT002-260

Teaching Use Dual head stethoscope



GT002-290

Stainless Steel Stethoscope
Cardiology type

GT002-291

Stainless Steel Stethoscope
Cardiology type

*Best service to all old and new clients!
Best greeting to all patients in the world!*

Sprague Rappaport Stethoscope

Sprague Rappaport type chest piece
Brass Chrome Plated Binaural
Plastic or soft eartips
All kinds of color available for the tube such
as: Black, Red, Green, Yellow, Blue, Purple, Pink, Grey, etc.
2sets of earplug, 1set of mebrane,
1pc of Large chest piece,
1pc of Middle chest piece,
1pc of Small chest piece



GT002-300

Sprague Rappaport Stethoscope
Silver color chest piece



GT002-310

Sprague Rappaport Stethoscope
Colored chest piece



GT002-320

Sprague Rappaport Stethoscope
Transparent tube



Fetal Stethoscope

GT002-400 Metal type

GT002-410 Pinard plastic type in white



GT002-900 Chest Piece



GT002-960A

Name tag



GT002-960B



GT002-293

Earplug



GT002-294

Single head stethoscope
Acrylic head,
pvc tube and aluminum earloop



GT002-295

Stethoscope
Dia of cover:4.6cm
Thickness of cover:0.8mm

Best service to all old and new clients!
Best greeting to all patients in the world!



GT003-100

Buck Neurological Hammer

hammerhead: zinc alloy with rubber plug
handle: nylon
with needle: zinc alloy, with brush
length of hammer: 22.5cm
height of hammer head: 8.5cm



GT003-200

Gear Wheel Hammer

hammerhead: zinc alloy
handle: zinc alloy




GT003-300

Taylor Hammer

Length of handle: 18cm
Size of rubber plug: 5 X 4.3 X 1cm
thickness of rubber plug: 1.5cm



GT054-200-D



GT054-200-KA



GT054-200-F



GT054-200-C



GT054-200-H

GT054-200

Tourniquet

GT054-200-D GF03D, 45x2.5cm
GT054-200-C GF03C, Kids, 38.5x2.5cm
GT054-200-F GF03F, 45x2.5cm
GT054-200-KA GF03KA, 45x2.5cm
GT054-200-H GF03H, 45x2.5cm



GT007-200

Altimeter device
Max height: 2meters



GT003-GF05B

Colorflex reflex hammer

hammerhead: rubber with copper ring
handle: nylon
length of hammer: 22.5cm
height of hammerhead: 7.5cm



GT003-400

Babinski (Adult) with Telescoping Handle

hammerhead: zinc alloy with rubber plug
handle: zinc alloy
length of handle: 21cm
diameter of hammerhead: 4.5cm
thickness: 1cm



GT003-500

Gristletly Hammer

Rubber plug
hammerhead: copper
handle: steel
length of hammer: 24cm
diameter of hammerhead: 4.5cm



GT143-100

Sound gear
Material: steel



GT143-101

F256 tuning fork
Material: steel



GT006-100

Diagnostic Pen Light

GT006-200

Diagnostic Pen Light



GT143-102

Resonance tuning fork



GT143-103

F512 tuning fork
Material: steel



GT005-100 ENT Kit

Ophthalmoscope-1
Otoscope carrier-1
Ear specula(3,4,5,6mm diam)-4
Nasal apeculum(8mm diam)
Dilating Nasal speculum-1
Laryngeal mirror stem-1
Laryngeal Mirrors-3
Tongue depressor plastic-1
Battery handle-1
Spare Bulbs(2large,4small)-6



GT005-101

Professional otoscope

Features

Fiberoptics for cool, obstruction free light transmission
Otoscope head made from polymid – an impact resistant space age thermoplastic
Swivelling viewing window with 2.5x magnification
"AA" polycarbonate battery handle interchanges
pocket clip with integral on/off slide switch for ambidextrous use


Technical data

magnification: 2.5x
distal dia: 2.5mm, 4mm
Bulb: 2.5V 1.6W halogen lamp
Batteries: two "AA" batteries or two "AA" NiMH
Rechargeable Battery



GT005-202

Buck neurological hammer
gear wheel hammer
taylor hammer
gristletly hammer
babinski telescoping handle

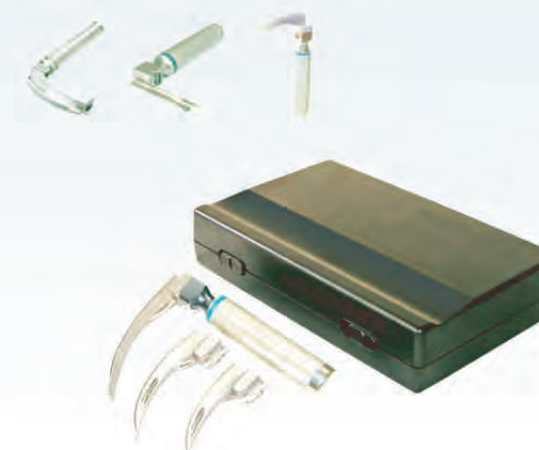

GT005-204

Fiber laryngeal mitrror
Power suply: 1.5V x 2 "C" type
Bulb: 2.5V / 0.35A
Blades: 92, 114, 134mm



GT005-102

Otoscope
deluxe packing : penlight,
part of otoscope,batteries



GT005-200

Reflex hammer gifts set

buck neurological hammer
babinski with telescoping handle
taylor hammer



GT005-103

Otoscope
deluxe packing : penlight,
part of otoscope,batteries



GT005-201

Buck neurological hammer
gear wheel hammer
taylor hammer
gristletly hammer



GT005-302

BO monitor Gift Set

the gift set including the following products:

1set BP monitor
1pc reflex hammer
1pc penlight
1pc dual head stethoscope
1pc thermometer



GT040-500

Disposable electrosurgical pencil

1.170mm-ABS pencil appearance
2.7cm Stainless Steel tip
3.2.36mm-diameter of the tip
4.3m-PVC medical cable
5.Maximal output current: 1A
6.Frequency confine:0-1.0MHZ
7.Ways of aseptic technique: Sterile EO
8.Current resistance:200Ω
9.Term of sterility:3 years
10.Package: 100PCS/Carton

*Best service to all old and new clients!
Best greeting to all patients in the world!*

THERMOMETER

Clinical Thermometer

Glass
Scale: °C or °F
Accuracy: $\pm 0.1^{\circ}\text{C}$ ($\pm 0.2^{\circ}\text{F}$)
White back, Yellow back or Blue back



GT004-130 Oral Use



GT004-100 Armpit Use, Large size



GT004-110 Armpit Use, Middle size



GT004-120 Armpit Use, Small size



GT004-140 Rectal Use

Digital Thermometer

Pen type, 3-Digital
Scale: °C or °F
Accuracy: $\pm 0.1^{\circ}\text{C}$ ($\pm 0.2^{\circ}\text{F}$)
Min Scale: 0.1°C
Memory function: last temperature
Measuring times: 2 minutes
Beeper function
Auto shut-off



GT004-201

Display range: 32.0°C ~ 42.0°C ,
 89.6°F ~ 107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 60 seconds
size: 127 x 18 x 10 mm
LCD: 15.5 x 6.5 mm
N.W.: 10.5g



GT004-202

Large LCD display
Display range: 32.0°C ~ 42.0°C ,
 89.6°F ~ 107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 60 seconds
size: 122 x 17 x 10 mm
LCD: 20 x 7.5 mm
N.W.: 9.5g



GT004-141

Cover for
mercury thermometer



GT004-142

Cover for
digital thermometer



GT004-203

Digital thermometer
Without waterproof function
hard tip

Temperature range: 32.0°C ~ 49.0°C ,
Accuracy: $\pm 0.1^{\circ}\text{C}$
Display mode: LCD (three and a half)
Power: 0.15mW(working)
Battery: AG31.5V ordinary button battery
Sound Tip: beep after measurement
Raw material: ABS plastic



GT004-204

Digital thermometer
Soft tip
waterproof

Temperature range: 32.0°C ~ 42.9°C ,
Accuracy: $\pm 0.1^{\circ}\text{C}$
Display mode: LCD (three and a half)
Power: 0.15mW(working)
Battery: AG31.5V ordinary button battery
Sound Tip: beep after measurement
Raw material: ABS plastic



GT004-205

Transparent

Display range: 32.0°C ~ 42.0°C ,
 89.6°F ~ 107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 60 seconds
size: 127 x 18 x 10 mm
LCD: 17.5 x 7.5 mm
N.W.: 10.5g



GT004-206

Display range: 32.0°C ~ 42.0°C ,
 89.6°F ~ 107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 60 seconds
size: 127 x 18 x 10 mm
LCD: 16.5 x 7 mm
N.W.: 10.5g

GT004-207

60" temperature taking lead time.
9 minutes Auto Off
Fever alarm
Memory of last reading
0.1 resolution
Bi-Bi signal after measurement finished
LCD size at 18 x 9.4 mm
Waterproof available at additional cost



GT004-210

Digital Thermometer

Pen type, 4-Digital
Scale: °C
Accuracy: $\pm 0.05^{\circ}\text{C}$
Min Scale: 0.01°C
Memory function: last temperature
Measuring times: 2 minutes
Beeper function
Auto shut-off



GT004-220 GT004-221

Water Resistance Digital Thermometer

Pen type, 3-Digital
Scale: °C or °F
Accuracy: $\pm 0.1^{\circ}\text{C}$ ($\pm 0.2^{\circ}\text{F}$)
Min Scale: 0.1°C
Memory function: last temperature
Measuring times: 2 minutes
Beeper function
Auto shut-off



GT004-220



GT004-221

GT004-222

Water-proof

Display range: $32.0^{\circ}\text{C} \sim 42.0^{\circ}\text{C}$,
 $89.6^{\circ}\text{F} \sim 107.6^{\circ}\text{F}$
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 60 seconds
size: 127 x 18 x 10 mm
LCD: 17.5 x 7.5 mm
N.W.: 10.5g



GT004-223

High accuracy Large LCD display Water-proof

Display range: $32.0^{\circ}\text{C} \sim 43.0^{\circ}\text{C}$,
 $89.6^{\circ}\text{F} \sim 109.4^{\circ}\text{F}$
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.01°C / 0.01°F
Response: 60 seconds
size: 133 x 18 x 13 mm
LCD: 20 x 7 mm
N.W.: 9g



GT004-230

Flexible Tip Digital Thermometer

Pen type, 3-Digital
Scale: °C or °F
Accuracy: $\pm 0.1^{\circ}\text{C}$ ($\pm 0.2^{\circ}\text{F}$)
Min Scale: 0.1°C
Memory function: last temperature
Measuring times: 2 minutes
Beeper function
Auto shut-off



GT004-231

Flexible probe
Water-proof
Large LCD display

Display range: 32.0°C~42.0°C,
89.6°F~107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 60 seconds
size: 126 x 18 x 10 mm
LCD: 20 x 7 mm
N.W.: 11.5g



GT004-232

Flexible probe
Water-proof
Large LCD display

Display range: 32.0°C~42.0°C,
89.6°F~107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 60 seconds
size: 125 x 20 x 11 mm
LCD: 20 x 7 mm
N.W.: 11.5g



GT004-233

Flexible probe
Water-proof
Large LCD display

Flexible tip more safe suit for baby;
60" temperature taking lead time.
9 minutes Auto Off
Fever alarm
Memory of last reading
0.1 resolution
Bi-Bi signal after measurement finished
LCD size at 18 x 9.4 mm
Water-resistant available at additional cost



GT004-260

Fast reading
Large LCD display

Display range: 32.0°C~42.0°C,
89.6°F~107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 10 seconds
size: 134 x 22 x 14 mm
LCD: 20.7 x 7 mm
N.W.: 12.5g

GT004-261

Fast reading / Water-proof
Large LCD display

Display range: 32.0°C~42.0°C,
89.6°F~107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 10 seconds
size: 134 x 22 x 14 mm
LCD: 20.7 x 7 mm
N.W.: 12.5g



GT004-262

Fast reading / Water-proof
Large LCD display

Display range: 32.0°C~42.0°C,
89.6°F~107.6°F
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 10 seconds
size: 134 x 22 x 14 mm
LCD: 20 x 7.5 mm
N.W.: 13.5g



GT004-263

Fast reading
Flexible probe
Large LCD display

Display range: 32.0°C~42.0°C,
89.6°F~107.6°F

Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 134 x 22 x 14 mm

LCD: 20.7 x 7 mm

N.W.: 12.5g



GT004-264

Fast reading
Flexible probe
Water-proof
Large LCD display

Display range: 32.0°C~42.0°C,
89.6°F~107.6°F

Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 134 x 22 x 14 mm

LCD: 20.7 x 7 mm

N.W.: 12.5g



GT004-265

Fast reading
Flexible probe
Water-proof
Large LCD display

Display range: 32.0°C~42.0°C,
89.6°F~107.6°F

Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 132 x 22 x 14 mm

LCD: 20 x 7.5 mm

N.W.: 13.6g



GT-004-266

Cartoon Digital Thermometer

Cartoon design and flexible tip

Measuring rang from 32°C to 42°C (89.6°F to 111.2°F)

0.1°C accuracy and fast response

Beep alarm when peak temperature is reached

Memory for last measurement

Automatic power off

Weight: 9.7g (including battery)

waterproof



GT-004-267

Digital Thermometer (waterproof)

Measuring rang from 32°C to 42°C (89.6°F to 111.2°F)

LCD manifestation easy to read

0.1°C accuracy and fast response

Beep alarm when peak temperature is reached

Memory for last measurement

Automatic power off

Weight: 9.6g (including battery)

waterproof



GT-004-268

Digital Thermometer (waterproof)

Convenient flexible tip (soft head)

10 seconds quick test

Big LCD display easy to read

Waterproof construction provides easy cleaning

Measuring range from 32°C to 42°C (89.6°F to 111.2°F)

0.1°C accuracy and fast response

Beep alarm when peak temperature is reached

Memory for last measurement

Automatic power off

Weight: 15g (including battery)

Measurement time: 10 seconds



Best service to all old and new clients!
Best greeting to all patients in the world!



GT004-240
Baby use
Digital Thermometer

3-Digital
Scale: °C or °F
Accuracy: $\pm 0.1^{\circ}\text{C}$ ($\pm 0.2^{\circ}\text{F}$)
Min Scale: 0.1°C
Memory function: last temperature
Measuring times: 2 minutes
Beeper function
Auto shut-off



GT004-241
Baby Pacifier
Digital Thermometer (Waterproof)

1) Display range: 32.0°C ~ 42.0°C / 90.0°F ~ 107.6°F
2) Accuracy: $\pm 0.1^{\circ}\text{C}$ / $\pm 0.2^{\circ}\text{F}$
3) Min. scale: 0.1
4) Memory: last measurement reading
5) Measurement time (reference only, it differs from people to people): 2min
5) Beeper function
6) Auto shut-off
7) Battery: 1.5V button battery (LR/SR-41)
8) Size: 62 x 46 x 50mm
9) LCD: 15 x 6mm
10) N.W.: 13g
11) Memory: last measuring reading



GT004-251
Disposable probe cover

GT004-250
Infrared Ear Thermometer

3-Digital
Scale: °C or °F
Accuracy: $\pm 0.2^{\circ}\text{C}$ ($\pm 0.4^{\circ}\text{F}$)
Min Scale: 0.1°C
Memory function: 10 group
Measuring times: 1 second
Beeper function
Auto shut-off

GT004-252

Infrared Ear Thermometer
1) Display range: 34.0°C ~ 44.0°C / 93.2°F ~ 111.2°F
2) Accuracy: $\pm 0.2^{\circ}\text{C}$ / $\pm 0.4^{\circ}\text{F}$
3) Min. scale: 0.1
4) Memory: 10 memories
5) Measurement time (reference only): 1 second
6) Beeper function
7) Auto shut-off (1min after idle)
8) Battery: 3V, Button battery (LR/CR 2032)
9) Battery life: approx. 4,000 takes
10) Dimensions: 110 x 35 x 35mm
11) N.W.: 36g (including batteries)
12) Safe and hygienic
13) Easy-clean and cover free design



GT004-253

Infrared Ear Thermometer

1) Display range: 34.0°C ~ 44.0°C / 93.2°F ~ 111.2°F
2) Accuracy: $\pm 0.2^{\circ}\text{C}$ / $\pm 0.4^{\circ}\text{F}$
3) Min. scale: 0.1
4) Memory: 10 memories
5) Measurement time (reference only): 1 second
6) Beeper function
7) Auto shut-off (1min after idle)
8) Battery: AAA x 2, alkaline batteries
9) Battery life: approx. 4,000 takes
10) Size: 146 x 32 x 37mm
11) N.W.: 75g (including batteries)
12) Safe and hygienic
13) Requires new disposable probe cover after each use



GT004-254

Infrared Ear Thermometer

1) Display range: 34.0°C ~ 44.0°C / 93.2°F ~ 111.2°F
2) Accuracy: $\pm 0.2^{\circ}\text{C}$ / $\pm 0.4^{\circ}\text{F}$
3) Min. scale: 0.1
4) Memory: 10 memories
5) Measurement time (reference only): 1 second
6) Beeper function
7) Auto shut-off (1min after idle)
8) Battery: 3V, Button battery (LR/CR 2032)
9) Battery life: approx. 4,000 takes
10) Dimensions: 118 x 28.5 x 21mm
11) N.W.: 36g (including batteries)
12) Safe and hygienic
13) Easy-clean and cover free design



Best service to all old and new clients!
Best greeting to all patients in the world!



GT004-255 Infrared Thermometer

Range of displayed temperature: 32.0°C–42.9°C (89.6°F–109.2°F)
Ambient temperature operating range: 10°C–40°C (50°F–104°F)
Storage temperature range: –25°C–55°C (–13°F–131°F)
Digital increment: 0.1°C/0.1°F
Maximum permissible error:
± 0.2°C/0.4°F 35.5–42.0°C (95.9°F–107.8°F)
± 0.3°C/0.5°F 32.0–35.4°C (89.6°F–95.7°F)
± 0.3°C/0.5°F 42.1–42.9°C (107.8°F–109.8°F)



GT004-310 Air Thermometer



GT004-320 Bath Thermometer

GT-004-256 Infrared Ear Thermometer (single scale or double scale display)

Display range: 32.0~42.9°C / 89.6~109.2°F
Accuracy: ±0.2°C / ±0.4°F
Min. scale: 0.1
Memory: 10 memories
Measurement time (reference only): 1 second
Beeper function
Auto shut-off (10 seconds after idle)
Battery: 3V, Button battery (CR 2032)
Battery life: approx. 5,000 takes
Dimensions: 140 x 35 x 30mm
Weight: 40g (including battery)



GT007-200 Alcohol tester

Advanced NM Hot-wire alcohol sensor
Quick response
SMD assembling, stable performance
Smart MCU control
Direct Testing process LCD indication
Portable design
No Touch Health Design
Audio and visible warning beyond preset level
Battery saving design, low voltage indication



GT008-100 Blood Glucose Monitoring System

Measuring range: 2.2–27.8mmol/L (40–500mg/dl)
Measuring time: 20 seconds
Memory capacities: 30
Power source: two replaceable 3-volt batteries (CR2032)
Battery life: ≥ 1000 tests
Life of test strips:
12 months (vial sealed), 3 months (after vial opened)
Volume of blood: 20
Net weight: 52g
Dimensions: 97(L) x 55(W) x 15(H)mm



GT008-200

Blood Glucose Meter & Test Strips

I. Features:

1. Economy --- low price with good quality.
2. Utility --- one key operation, convenience and utility.
3. Rapidity --- only one drop of blood, it can come to an accurate result in 20 seconds.
4. Multifunction adding --- 30 memory capacitances, easy to check.
5. Warranty --- we committed a 5-year free service.



II. Specifications:

1. Measuring Range: 2.2-27.8mmol/L (40-500mg/dl)
2. Test Sample: Fresh Capillary Whole Blood
3. Sample Size: Approx 3-5 microlitres
4. Measuring Time: 20 seconds
5. Type A Type C 5. Memory capacitance: 30 results
6. Battery Life: ≥ 1000 tests Type A Type C
7. Battery low warning: The battery low warning (battery icon) shall occur when the battery voltage is low
8. Life of test strips: 18 months (vial sealed), 2 months (after vial being opened)
9. Net weight: 44g
10. Volume of blood: $\geq 15\mu\text{l}$ (Type A), about $4\mu\text{l}$ (Type C)

GT008-300

Blood Glucose Meter & Test Strips

Blood glucose meter is a new meter

I. Features:

1. Multifunction: including the pulse test
2. Less Measuring Time: 5 seconds
3. More Memory capacitance: 60 results
4. Big screen
5. Warranty --- we committed a 5-year free service.

II. Specifications

1. Measuring Range: 2.2-27.8mmol/L (40-500mg/dl)
2. Measuring Time: 5 seconds
3. Memory capacitance: 60 results (Advanced)
4. Battery Life: ≥ 1000 tests
5. Power Source: Two replaceable 3-volt batteries(AAA)
6. Meter Repeatability: $sd \leq 3\text{mg/dl}$
7. Life of test strips: 18 months (vial sealed), 2 months (After vial opened)
9. Measuring Rang of PR: 30 bmp~240 bmp
10. Measuring Time: 8 seconds

The meter will turn on after you insert a strip, and will shut down automatically in 10 senconds without the input signal



PHYSICIAN SCAN



Ningbo GREETMED Medical Instruments Co.,Ltd.

Add: 18F, No.1 Building, Wante Business Centre, Hi-Tech Zone, Ningbo, China

Tel: 0086-574-87739070, 87722370

Fax: 0086-574-87739075, 87722360

E-mail: info@china-greetmed.com

Http://www.china-greetmed.com



GT130-100
Electronic Infant Scale
Max. Weighing: 20kg



GT130-200
Baby Scale
Max. Weighing: 20kg



GT130-300
Electronic Infant Scale
Max. weighing: 20kg
Min. value per division: 50g



GT130-400
Max. weighing: 25kg
Min. value per division: 100g



GT130-500
Baby Scale
1. Tray Size: 56X28X9.3cm
Body Size: 36X29.5X7.5cm
Net Size: 56X31.5X13.5cm
2. Max. weight: 30kg
3. Graduation: 5g
4. Lcd Display+auto Power Off
+low Battery Indicator+1 Loadcell
5. Precision: +/-1%
6. Displayed In Two Units: Kg/Lb/Oz
7. Batteries: 4xaaa(not Included)
7. Lcd Size: 7*2.8cm



GT131-120
Health Scale
Max. Weighing: 120kg



GT131-160
Health Scale
Max. Weighing: 160kg



GT131-200
Health Scale
Max. Weighing: 200kg



GT131-300
Electronic Body Scale
Max weighing: 200kg
Division: 100g
Display: LED Power: AC/DC
Height range to be measured: 800-2100mm
Min value of height per division: 5mm
G.W.: 15kg N.W.: 13kg
Measurement: 100 x 32 x 26cm



GT131-400
Electronic Body Scale
Max weighing: 200kg
Division: 100g
Display: LCD Power: AC/DC
Height range to be measured: 800-2100mm
Min value of height per division: 5mm
G.W.: 15kg N.W.: 13kg
Measurement: 100 x 32 x 26cm

*Best service to all old and new clients!
Best greeting to all patients in the world!*



GT132-101
Bathroom scale



GT132-102
Bathroom scale



GT132-203
Bathroom scale



GT132-204
Bathroom scale



GT132-103
Bathroom scale



GT132-202
Bathroom scale



GT132-205
Bathroom scale



GT132-206
Bathroom scale

MOBILITY AID



GT135-874L
Wheel chair
Aluminum type



Ningbo GREETMED Medical Instruments Co.,Ltd.

Add: 18F, No.1 Building, Wante Business Centre, Hi-Tech Zone, Ningbo, China

Tel: 0086-574-87739070, 87722370

Fax: 0086-574-87739075, 87722360

E-mail: info@china-greetmed.com

Http://www.china-greetmed.com



GT135-809
Wheel chair
Steel type



GT135-909B
Wheel chair
Steel type



GT135-870ABJ
Wheel chair
Steel type

MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO													
											(Kg)	DIM	NW/GW
GT135-809-41(-46)	60(65)	24	41(46)	59	20	50	87	106	40	45	100	93x24x88	19/ 21
GT135-874L-41	63	28	41	57	15	45	82	100	40	45	100	90x28x85	13/ 15
GT135-909B-41(-46)	56(61)	28	41(46)	60	20	50	94	109	40	45	110	80x28x94	20/ 22
GT135-870ABJ-41(-46)	61(66)	28	41(46)	40	15	45	90	100	40	45	100	82x28x70	15/ 17

*Best service to all old and new clients!
Best greeting to all patients in the world!*



GT135-871LB
Wheel chair
Aluminum type



GT135-952LBC
Wheel chair
Aluminum type



GT135-874LAH
Wheel chair
Aluminum type



GT135-681
Commode wheelchair



GT135-681A
Commode wheelchair



GT135-619GC
Commode wheelchair

MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO													
GT135-871LB-41(-46)	58(63)	28	41(46)	40	15	47	89	90	36	40	100	80x28x90	10/ 12
GT135-874LAH-35	58	28	35	52	15	45	85	93	36	45	90	86x28x68	12/ 14
GT135-952LBC	65	35	41	61	15	51	93	106	40	45	120	80x34x94	17/ 19

MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO													
GT135-681-46	66	30	44	59	15	50	89	102	44	44	100	75x33x89	23 / 25
GT135-681A-46	66	30	44	59	15	50	95	102	43	51	90	75x33x76	22.6/25.6
GT135-619GC	66	—	44	58	20	55	129	—	90	184	100	92x34x92	25.2/ 28.7

*Best service to all old and new clients!
Best greeting to all patients in the world!*



GT136-913L



GT136-917L



GT136-915L



GT136-912L



GT136-914L

MAIN PARAMETERS

MODEL Number	LENGTH (cm)	WIDTH (cm)	HEIGHT (cm)	N.W. (Kg)	DIM (Cm)	PCS CN	G.W. (Kg)
GT136-912L	57	60	74.5-92	2.6	58x18x81	2	7
GT136-913L	56	57	74.5-92	2.4	54x18x80	2	6
GT136-914L	52	60	82-92	3.6	60x35x93	2	9.4
GT136-915L	56	60	74.5-92		58x18x81	2	7
GT136-917L(L)	57	42	87-97	1.4	95x68x35	10	16
GT136-917L(M)	57	42	77-87	1.2	85x68x35	10	14
GT136-917L(S)	57	41	67-77		75x68x35	10	12

COMMODE CHAIR - WITHOUT WHEEL



GT136-810



GT136-898

MAIN PARAMETERS

Item Code									PCS CN	G.W (kg)
GT136-810	56	46	41-51	74-84	40	33	6	60x32x48	2	13.4
GT136-898	41	38	40		40		1.6	75x30x40	6	10.7

Stick



GT137-925L



GT137-928L



GT137-938L



GT137-936L



GT137-927L

MAIN PARAMETERS

MODEL Number	HEIGHT (cm)	N.W. (Kg)	DIM (Cm)	PCS CN	G.W. (Kg)
GT136-925L(L)	128-148	0.9	132x33x29	20	19
GT136-925L(M)	116-136	0.85	119x33x29	20	18
GT136-925L(S)	103-123	0.8	103x33x29	20	17
GT137-927L	82-92	0.3	64x29x16	20	7
GT137-928L	77.5-100	0.3	79x29x18	20	7
GT137-936L	120	0.3	35x20x26	40	13
GT137-938L	77.5-100	0.35	79x34x19	20	8

Best service to all old and new clients!
Best greeting to all patients in the world!

GT137-929L



GT137-910L

GT137-930L

GT137-924



GT137-921



GT137-922



GT137-922



MAIN PARAMETERS

MODEL Number	HEIGHT (cm)	N.W. (Kg)	(Cm)	P C S CN	G.W. (Kg)
GT137-910L	89	0.3	94x28x15	20	7
GT136-921	72.5-95	0.9	79x34x43	10	10
GT136-922	72.5-95	0.9	60x28x47	10	10
GT136-924	65-87.5	0.8	79x34x43	10	9
GT137-929L	68.5-91	0.3	65x28x15	20	7
GT137-930L	68.5-91	0.3	65x28x15	20	7
GT136-932	80-102.5	0.9	60x28x47	10	10

GT141 Tractor for neck ache



GT141-101

GT141-102

GT141-110

cervical collar
macromolecule foam materials, light.



Tractor for neck ache
Designed for treating and preventing neck fractured is location of vertebra. Protrusion of the intervertebral disc and excessive stretch and draw. It can support the patient's head efficiently depending on appropriate air pressure, so that it can release the neck and shoulder burden. Also it has the magnetic infrared treatment function to dispel the pain.

GT140-102
Infusion stand



GT142-101

GT142-102

GT142 Luxurious eyesight lamp box

This is served as an apparatus for enghtsight examination in hospitals .
In practical use, it boasts the advantages of soft and comfortable lighting levels and, being made of alluminum materials, it has a very handsome appearance.
There are three styles available—desktop style, wall style and hanging style.
Main Technical data:
Power voltage: AC 220V ± 10%
Frequency: 50Hz
Power: 60w




GT143-200 Operation reflector lamp

Stainless haulm,
hose flexible lift type,
unbending rise or drop.
Voltage: AC 220V;
frequency: 50Hz;
power: 60W



Best service to all old and new clients!
Best greeting to all patients in the world!

HOSPITAL EQUIPMENT

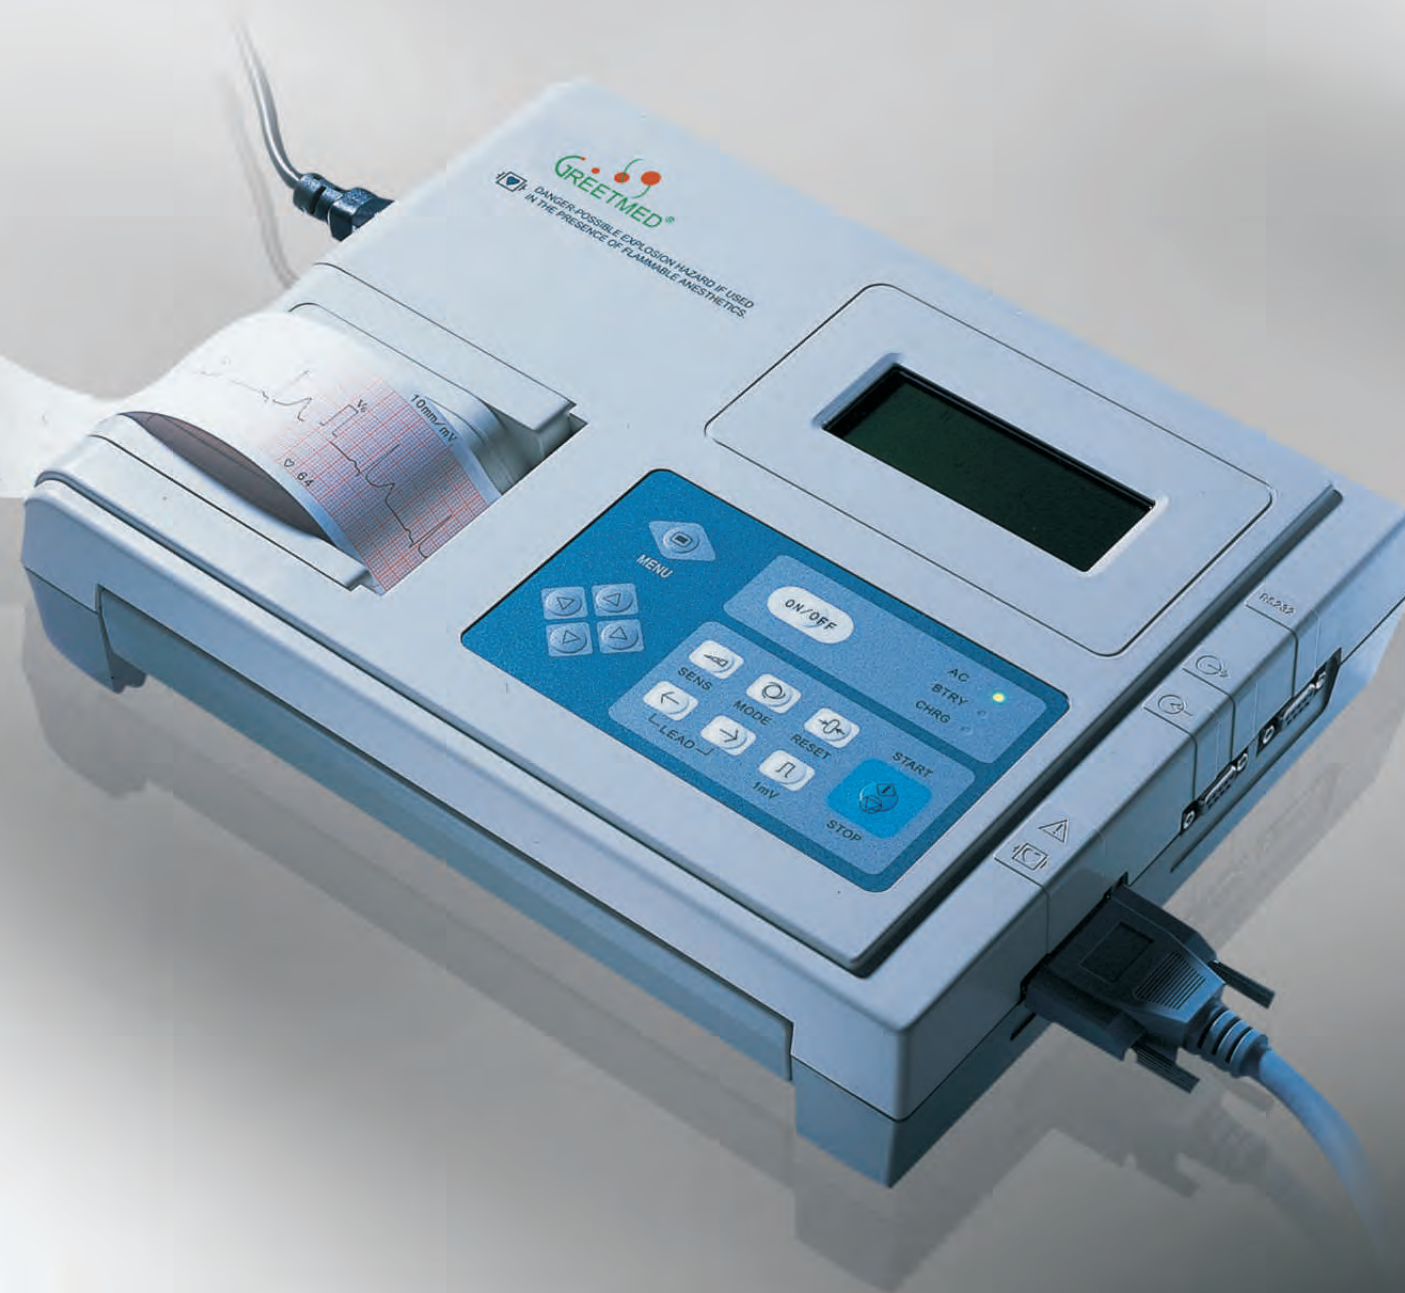

Ningbo GREETMED Medical Instruments Co.,Ltd.

Add: 18F, No.1 Building, Wante Business Centre, Hi-Tech Zone, Ningbo, China

Tel: 0086-574-87739070, 87722370

Fax: 0086-574-87739075, 87722360

E-mail: info@china-greetmed.com

Http://www.china-greetmed.com



GT147-101

Single channel automatic electrocardiograph

High resolution thermal printer
AC/Rechargeable battery
Unique design of rhythm lead
LCD Display
A C,EMG and DFT Filter
Waveform display

GT147-101

GT147-201

12 channel digital electrocardiograph

Features Literature Technical Gallery Main Features

1. Design patent issued by the State Intellectual Property Office of China
2. Reliable measurement and analysis result contributed by CSE database
3. Software copyright patent of "real-time age-analysis" which ensures accurate analysis results issued by the State Intellectual Property Office of China
4. 12.1"color TFT LCD display
5. Simultaneous acquisition and display of 12 channel ECG waveforms
6. Alphameric keyboard, one touch operation
7. Complete digital filters of ADS, EMG, HUM and low-pass
8. Freeze function: observe any abnormal ECG waveform
9. Pre-10-second printing function: print out any abnormal ECG waveform
10. Multi-format printouts
11. Any lead can be rhythm lead
12. Detection and alarm of lead-off and low battery capacity
13. Automatic adjustment of baseline for optimal recording
14. Built-in Help Function: electrode positioning, ECG basic knowledge, common trouble-shooting and so on
15. Clinical information such as patient ID, name, gender, age, height, weight, blood pressure, hospital name can be input
16. Maximum 2,000 ECG files can be saved. Saved ECG files can played back or printed out
17. Flexible saving interface. Saved ECG files can be displayed in image-text or list format, easy for search
18. Auto-save function: after printing, the printed ECG file will be automatically saved to flash or SD card
19. Communicate with PC for ECG data management(option)

Functions of T12 are listed in below table.



GT147-201



GT147-106

GT147-106

Six channel interpretive electrocardiograph

High resolution thermal printer
Anti drift filter
Multiple print Format
AC/Rechargeable battery
Simultaneous 12 lad acquisition
LCD Display
ECG measurement/Interpretation
Powerful AC & EMG Filter

*Best service to all old and new clients!
Best greeting to all patients in the world!*

GT147-602

Single channel digital electrocardiograph

12-lead simultaneous acquisition
3.8" LCD, real-time display of 12 channel ECG waveforms
Detection and alarm on lead-off and low battery capacity
Automatic adjustment of baseline for optimal printing
Built-in ECG simulator for DEMO purpose
3 kinds of operation mode: AUTO, MAN and ANA
3 kinds of filter: HUM, EMG and ADS
power supply: AC, DC and battery
2 types lead mode: Standard and Cabrera
15 ECG files can be save in the ECG
1,000 ECG files can be save to SD card (Option)
Communication with PC (Option)



GT147-602

GT147-603

GT147-603

Fetal monitor

Main performance

Security:

Anti-shock types: Facilities I, no internal power supply Anti-electric Shock Degree: B Working Voltage: AC 100 V~240 V
Frequency: 50 Hz/60 Hz P<60 VA Fuse: T1.6AL250V Display Dimensions: 8.0 "color LCD display, folding 60 degree Display
Content: bed No. , pregnancy weeks, age, paper speed, date, time , volume, alarm status, transducer connection status, recorder status, FHR data and wave, Contraction data and wave, Fetal move times and mark etc.

Print:

Record Paper two-double type Z Print Width: 112 mm Valid Print Width: 104 mm Paper output speed: 1 cm/min, 2 cm/min, 3 cm/min(optional) Data Precision: $\pm 5\%$ (X Roll) , $\pm 1\%$ (Y Roll) Record Content: hospital , bed No. , name, pregnancy weeks, patient No., paper speed, date, time , FHR data and wave, Contraction data and wave, Fetal move times and mark etc.

Ultrasound probe:

Nominal Frequency: 1.0 MHz Work Frequency: 1.0 MHz $\pm 10\%$
Negative peak sound pressure : $p_{-} < 1$ MPa Output beam intensity : $I_{ob} < 20$ mW/cm²
The peak time space peak intensity: $I_{spta} < 100$ mW/cm² The average time space peak intensity: $I_{sata} < 10$ mW/cm²
FHR Rang: 50 BPM~240 BPM Resolution: 1 BPM Accuracy : ± 2 BPM

TOCO

TOCO range: 0~100 % Resolution: 1 %
Nonlinear error: $< \pm 10\%$ RZ way: Manually
Fetal Marking
For the manual button (the operation of pregnant women), there will be a mark display in the bottom area of FHR wave display section.
FHR Alarm: Alarm for high and low FHR, which exceeds appointed limit.



GT148-101
ECG Paper

GT148-301
Electrode code

GT148-201
Ultrasound gel

GT148-202

5L barrel pliancy

Technical Parameter

- 1)pH value: 5.5 ~ 8.0
- 2)viscosity (25°C): ≥ 15 Pa.s
- 3)velocity of sound: 1520 ~ 1620 m/s
- 4)acoustic impedance: $1.5 \times 10^6 \sim 1.7 \times 10^6$ Pa?s/m
- 5)acoustic attenuation: ≤ 0.1 dB/(cm · MHz)



GT147-50D+

Fingertip oximeter

Display Mode: 0.96" Dual-color OLED display(blue and yellow)
Screen Resolution: 128*64
SpO2 Measuring Range: 0% ~ 100%, (the resolution is 1%).
Accuracy: 70% ~ 100%: $\pm 2\%$,Below 70% unspecified.
PR Measuring Range: 30bpm ~ 250bpm, (the resolution is 1bpm)
Accuracy: ± 2 bpm or $\pm 2\%$ (select larger)
Measurement Performance in Weak Filling Condition:SpO2 and pulse rate can be shown correctly when pulse-filling ratio is 0.4%.
SpO2 error is $\pm 4\%$, pulse rate error is ± 2 bpm or $\pm 2\%$ (select larger).
Resistance to surrounding light: The deviation between the value measured in the condition of man-made light or indoor natural light and that of darkroom is less than $\pm 1\%$
Power Consumption: less than 30mA
Voltage: DC 2.6V~3.6V
Power Supply:1.5V (AAA size) alkaline batteries $\times 2$
Battery working hour: Theoretical number is 32 hours.
Safety Type:Interior Battery, BF Type

Sell in standard:

A hanging rope
A user manual
A data line
A disk (PC software)
Sell in addition:
RF wireless module
Oximeter probe(Refer to probe application instruction for details and notice renewal)

Physical Identity

Dimension: 58.5(L) $\times$ 31(W) $\times$ 32(H) mm
Weight: About 52g (with the batteries)



GT147-60D

Handheld oximeter

SPO2:
Measurement Range:0 ~ 100%
Resolution:1%
Accuracy: $\pm 2\%$ (70%~100%, Adult/Pediatric, non-motion)
 $\pm 3\%$ (70%~100%, Neonate, non-motion)
0% ~ 69% unspecified
Alarm Range:0% ~ 100%
Refreshing Rate:1s
Pulse Rate:
Measurement Range:25 ~ 250 bpm
Resolution:1bpm
Accuracy: ± 3 bpm (non-motion)
Alarm Range:25 ~ 250 bmp
Refreshing Rate:1s

Sell in standard:

A user manual
A data line
A disk (PC software)
An oximeter probe
Sell in addition:
Other oximeter probe(Refer to probe application instruction for details and notice renewal)

Physical Identity

Dimension: 110(L) $\times$ 60(W) $\times$ 23(H) mm
Weight: About 180g (with Alkaline battery2AA)



GT147-50DL

Fingertip oximeter

LED display
SPO2:35~99% pluse ratio:30~250BPM
Resolution: 1% for SPO2, 1BPM for pulse ratio
Accuracy: $\pm 2\%$ (70% ~ 99%), unspecified (<70%) for SPO2, ± 2 BPM or $\pm 2\%$ (select larger) for pulse ratio
Power: 1.5V (AAA size) alkaline batteries $\times 2$
Can work more than 30hours continuously
Interference resistance capacity against ambient light and measurement performance at low perfusion

Sell in standard:

A hanging rope
A user manual

Physical Identity

Dimension: 61(L) $\times$ 36(W) $\times$ 32(H) mm
Weight: About 50g (with the batteries)



GT147-901

Handhold ECG Monitor

Main Function

Direct collection of ECG on chest, realtime refresh of display and memory
Frozen and extended display during ECG collection and replay Character display of ECG parameter(HR,QRS, RH, P-R)
Rhythm classification with Multi-Language and alarm in dangerous
Display of heart beating peried histogram in order and random
Storage and accese of typical ECG segments
Output port can be connected to any ECG machine or micro-printer to get record

Best service to all old and new clients!
Best greeting to all patients in the world!



GT151-101

Electronic spirometer

Test range: Vc:0 ~ 9999mL
Accuracy: $\leq \pm 5\%$ (F.S)
Working environment: 5 ~ 40°C
Relative humidity: $\leq 80\%$ RH
Power: 220V(or 2 AA battery)



GT151-102

Electronic spirometer

vital capacity: Vc:0 ~ 10L
accuracy: : $\leq \pm 5\%$ (F.S)
tidal volume: 0.10 ~ 2.00L
accuracy: : $\leq \pm 5\%$ (F.S)
Max. voluntary ventilation/min :0 ~ 200L/min
accuracy: : $\leq \pm 5\%$ (F.S)
Working environment: 5 ~ 40°C
relative humidity: $\leq 80\%$ RH
power:220v



GT151-103

Electronic spirometer

vital capacity: Vc:0 ~ 10L
accuracy: : $\leq \pm 5\%$ (F.S)
tidal volume: 0.10 ~ 2.00L
accuracy: : $\leq \pm 5\%$ (F.S)
Max. voluntary ventilation/min :0 ~ 200L/min
accuracy: : $\leq \pm 5\%$ (F.S)
Working environment: 5 ~ 40°C
relative humidity: $\leq 80\%$ RH
power:220v

GT149-204

Compressor nebulizer

This equipment sprayed liquid medication to fog panel by compressing air, and form tiny particles, which flow into the throat through imbibing tube. It adopts oil-free-high-efficiency valve with no need for daily lubrication and it is with low noise, tiny particles. It is an ideal product for family and medical units' use.

Principle technical date:

Maximum compressor pressure: ≥ 0.15 Mpa

Compressor free air flow: ≥ 10 L/MIN

Maximum nebulization rate: ≥ 0.2 ML/MIN

Power :< 150 VA



GT149-205

Compressor nebulizer

This equipment sprayed liquid medication to fog panel by compressing air, and form tiny particles, which flow into the throat through imbibing tube. It adopts oil-free-high-efficiency valve with no need for daily lubrication and it is with low noise, tiny particles.

It is an ideal product for family and medical units' use

Powerful piston pump is efficient, dependable and quiet.

Comes complete with ampule for nebulizing, mouth piece, tubing and user manual.

Principle technical date:

New, lightweight portable design: ≤ 2.0 KG

Electric requirements: AC220 $\pm$ 22V 50Hz $\pm$ 1Hz

Maximum compressor pressure: ≥ 0.15 Mpa

Compressor free air flow: ≥ 10 L/MIN

Maximum nebulization rate: ≥ 0.2 ML/MIN

Sound level: ≤ 65 dB (A)

Power :< 150 VA



GT149-206

Nebulizer series

Atomizer adopts all-transistor circuitry, passes through electron coupling oscillating circuit it, produces ultrasonic. The ultrasonic makes water soluble medicine become tiny particles by aqueous medium. It reaches user's mouth by mouth piece and mask.

Features: various uses, more suitable for home use

- 1、 This product is suitable for the surroundings, which need faint scent or disinfectant, or increasing humidity.
- 2、 Facial cleaning & beauty care: Applying over 1MHz ultrasonic nebulized mist to clean the face is very effective, and it is a usual skin care method, very convenient and comfortable.
- 3、 Jewelry cleaning: Immerse the jewelry in the detergent and then turn on the machine. The grease and dirt can be removed from the jewelry after 10 minutes.

Principal technical data:

Voltage: AC220V 50Hz
Power: 45VA
Ultrasonic frequency: 1.7MHz $\pm$ 10%
Max nebulizing rate: $\geq$ 3ml/min
Timing range: 0 ~ 60min no adjustable range
Continuous load time: $\geq$ 4h
Medication cup capacity: $\geq$ 150ml



GT149-101

Ultrasonic nebulizer

Max capacity of medicine cup: 50ml;
Capacity of water trough: 250ml
Nebulizing amount: 3ml/min-5ml/min



GT149-201

Compressor nebulizer

Max capacity of medicine cup: 10ml
Nebulizer rate: 0.4ml/min
Particle size rate: 5.2 μ m (MMD*)
Residual of a medicine: $\leq$ 0.5 ml
Noise: 56dB(A)



GT-149-203

Handholding Style Ultrasonic Nebulizer AC and DC Commutable

Max capacity of medicine cup: 10ml
Capacity of water trough: 50ml
Nebulizing amount: 1ml/min-2ml/min
Gross weight of single package: 1000g, 10 in one package



GT149-202

Compressor nebulizer

Max capacity of medicine cup: 5ml
Nebulizer rate: 0.2ml/min
Particle size rate: 2.5 μ m (MMD*)
Residual of a medicine: $\leq$ 0.5 ml
Noise: 50dB(A)



GT150-300

Urine Analyzer

Main technical:

Testing items: GLU, BIL, SG, KET, BLD, PRO, URO, NIT, LEU, VC, PH value
Testing wavelength: 550nm, 620nm, 720nm
Testing speed: 144 pieces/hour
Data storage: storage of no less than 3000 sample data, free query in term of testing data and sample number
Reaction time: 25-30 seconds
Printer: built-in high-speed, temperature sense printer
Power supply: 220V $\pm$ 22V 50Hz $\pm$ 1Hz

Best service to all old and new clients!
Best greeting to all patients in the world!



GT146-101

Characteristics:

1. Fully stainless steel structure.
2. Double scale indication pressure gauge.
3. Electric heated.
4. Easy to operate, safe and reliable



GT146-103

Vertical pressure steam sterilizer

Characteristics:

1. Fully stainless steel structure
2. Hand wheel type of quick-open door structure
3. Door safety lock system
4. Automatically controlled by computer
5. Digital display of working status, touch of key
6. Over temperature & over pressure auto-protection
7. Steam-water inner circulation system: no steam discharge, and the environment for sterilizing will be clean and dry
8. Self-inflating type seal
9. Safe protection of water lacking
10. The drying system is optional, which can be equipped according to the customers' request
11. Automatically shut off with beep reminding after sterilization
12. With two stainless steel sterilizing baskets



GT146-104

Horizontal Cylindrical Pressure Steam Sterilizer

Characteristics:

1. Sterilizing course automatic sterilization controlled, easy to operate.
2. With drying function, suitable dressing drying.
3. With over-temperature, over-pressure auto-protect device.
4. The door opening mechanism cannot be operated until the pressure in the chamber is reduced to 0.027MPa. It can't be start on if the door doesn't close well.
5. The safety valve will be open automatically when the inner pressure over 0.24MPa, and the steam be exhausting to the water tank.
6. The power will be cut-off automatically, cut-off the water and alarm when the machine lacking water.
7. The chamber of the sterilizer is made of stainless steel.



GT146-102

Vertical pressure steam sterilizer

Characteristics:

1. Fully stainless steel structure
2. Hand wheel type of quick-open door structure
3. Door safety lock system
4. Automatically controlled by computer
5. Digital display of working status, touch of key
6. Over temperature & over pressure auto-protection
7. Steam-water inner circulation system: no steam discharge, and the environment for sterilizing will be clean and dry
8. Self-inflating type seal
9. Safe protection of water lacking
10. The drying system is optional, which can be equipped according to the customers' request
11. Automatically shut off with beep reminding after sterilization
12. With two stainless steel sterilizing baskets



GT151-104
Oxygen absorber



GT151-107
Oxygen absorber



GT151-108
Oxygen absorber



GT151-109
Oxygen absorber

Model	Service Medium	Max. discharge pressure	Max. discharge pressure	Nominal Flow Rate	Precision class	Inlet Connection	Outer Connection
GT151-104	Oxygen	200Kg/cm ²	0.2-0.3 Mpa	1-10L/min	4 Class	CGA540	M10X1-RH(M)
GT151-107	Oxygen	150Kg/cm ²	0.2-0.3 Mpa	1-15L/min	4 Class	G5/8"-RH(F)/CGA540	M10X1-RH(M)
GT151-108	Oxygen	150Kg/cm ²	0.2-0.3 Mpa	1-15L/min	4 Class	G5/8"-RH(F)/CGA540	9/16-18RH(M)
GT151-109	Oxygen	200Kg/cm ²	0.2-0.3 Mpa	1-10L/min	4 Class	G5/8"-RH(F)/	M10X1-RH(M)

Best service to all old and new clients!
Best greeting to all patients in the world!

Urine Container



GT138-106
PP material
size: 32 x 23.8 x 8.5cm
110g



GT138-107
PE material, 1000cc,
size: 32 x 21 x 10.5cm
60g



GT138-108
PP material,
size: 36.5 x 28 x 10.6cm
180g



GT138-109
PE material,
size: 34 x 26.5 x 9cm
300g



GT138-110
PP material,
size: 34oz, 230g



GT138-111
PP material,
size: Up-dia : 12.2cm,
Bottom-dia: 9.3cm,
H: 16.3, 63g



GT138-112
PE material,
size: Up-dia: 11.5cm,
Bottom-dia: 8, H: 13.6cm,
capacity: 800ml, 13g



GT138-113
PP material,
size: 51 x 28 x 9cm
500g



GT138-114
News paper
size: 25.5 x 11.5 x 11cm



GT138-115
News paper
size: 25 x 11 x 10.8cm



GT138-116
PP material,
size: 25 x 10 x 4.9cm
25g



GT138-117



GT138-118



GT138-119



GT138-120



GT138-121



GT138-122



GT138-123



GT138-124



GT138-101



GT138-102



GT138-103



GT138-104



GT138-105



GT139-100



Our Brand Package



GT001-101
Aneroid
Sphygmomanometer



GT001-110
Aneroid Sphygmomanometer
With Separate Single Head Stethoscope



GT001-120
Palm Type Aneroid
Sphygmomanometer



GT001-121
Palm Type Aneroid
Sphygmomanometer



GT001-126
Palm Type
Aneroid Sphygmomanometer



GT001-140
Aneroid Sphygmomanometer



GT001-200
Professional Mercury Sphygmomanometer
Desk type



GT002-100~160
Single head stethoscope




GT002-200~160
Dual head stethoscope



GT002-270~290
Stainless Steel Stethoscope



GT002-300~320
Sprague Rappaport
Stethoscope



GT002-400
Fetal Stethoscope



GT004-130
Oral Use Clinical Thermometer



GT004-100~120
Armpit Use Clinical
Thermometer



GT004-204
Digital Thermometers



GT004-240
Baby use Digital Thermometer



GT004-250
Infrared Ear Thermometer



GT006-100
Pen Light



GT151-104
Oxygen absorber



GT132-101
Bathroom scale




GT132-103
Bathroom scale



GT130-100
Electronic Infant Scale
Max. Weighing: 20kg

CE Certificate

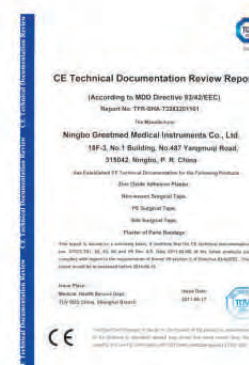

Best service to all old and new clients!
Best greeting to all patients in the world!